Multi-Purpose Double-Coated Cloth Tape

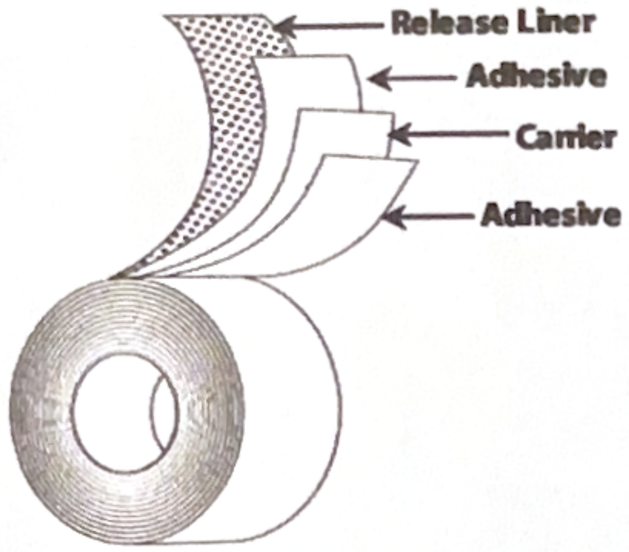

Carrier: Cloth

Adhesive: Rubber

Liner: White Kraft Paper

Colors: Natural (adhesive color)

Specifications: Boeing BAC5034-4 Section 5.1.a(1)(a); BAC-5317 Rev F

Standard Sizes: 48mm x 23M, 48mm x 33M, 72mm x 23M

*Paper liner available in slit rolls only.

Applications

- Carpet hold-down for the convention and entertainment industry
- Hanging, seaming, and splicing poly sheeting
- General mounting and holding

Features

- Cloth reinforcement
- Natural rubber based adhesive
- Low VOC Content

Benefits

- Good strength and elongation for easy tear, application and removal
- Conformable and moisture resistant
- Clean removal from most surfaces
- High tack and aggressive adhesion for a secure bond
- Can contribute toward satisfying EQ Credit 4.1 (Low Emitting Materials) under LEED®

Typical Test Values

	Standard UOM	Metric UOM	Test Method
Total Thickness	11.0 mils	0.279 mm	ASTM D-1000
Adhesion to Steel	40 oz/in	4.38 N/cm	PSTC-101
Tensile Strength	20 lb/in	35.03 N/cm	ASTM D-1000
Operating Temperature	40 to 200 °F	4 to 93 °C	
VOC Content	<1 g/L		

Recommended Storage Conditions: 60-80 °F at 40-60% RH

Standard Shelf Life (at 25 °C): 24 months from date of manufacture.

The information presented herein was prepared at BERRY GLOBAL, INC (25 Forge Parkway Franklin, MA 02038) by qualified technical personnel. To BERRY's knowledge it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user, as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state and local laws and regulations. The data are submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which BERRY assumes any legal responsibility.

CP 27® 14-D RELEASE® BLUE PAINTER'S TAPE - MULTI-SURFACE

TYPICAL APPLICATIONS

- For interior and exterior use on multiple surfaces, including painted walls, glass, vinyl, metal and wood
- Not recommended for use on wallpaper, unpainted wallboard, ceiling tile or with uncured coatings

PRODUCT FEATURES

- Premium grade, multi-surface ShurRELEASE® blue painter's tape
- Medium adhesion
- UV-resistant
- Easy, no-residue removal
- Prevents lifting and paint seepage for cleaner paint lines
- Solvent-free, high performance adhesive bonds quickly to the surface, allowing for painting immediately after application
- Great for temporary indoor floor marking and removes cleanly from most surfaces for up to 60 days. Not recommended for hardwood floors
- *Test before use on all surfaces and when using solvent-based coatings

CONSTRUCTION

Backing: Fine structured crepe

Adhesive: Synthetic rubber-based adhesive

STANDARD WIDTHS

0.7 in; 0.94 in; 1.41 in; 1.88 in; 2.93 in

18 mm; 24 mm; 36 mm; 48 mm; 72 mm

STANDARD LENGTH

60.1 yd

55 m

Lead times may apply. Please contact Shurtape customer service for information related to stock and non-stock sizes and colors.

STANDARD CORE SIZE

3 in

APPLICABLE STANDARDS

NA

STORAGE & USAGE CONDITIONS

Tape should be stored in its original packaging in a cool, dry area away from direct sunlight and should be used within 12 months of date of shipment. Surfaces to which tape is applied should be clean, dry and free of grease, oil or other contaminants.

COLOR

Blue (BLU)

PHYSICAL PROPERTIES	STANDARD	METRIC
Adhesion to Stainless Steel	32.5 oz/in width	3.56 N/10 mm
Elongation	10%	10%
Service Temperature Range	50 F to 200 F	10 C to 93 C
Tensile	22.5 lbs/in width	39.4 N/10 mm
Thickness	5.08 mils	0.13 mm

Physical and performance characteristics shown above are obtained from tests recommended by PSTC, ASTM, government agencies or Shurtape Technologies, LLC, Quality Assurance and Technical Service departments and do not represent a guarantee of product performance. Individual rolls may vary slightly from these averages. The user should determine whether the product is fit for a particular purpose and is suitable for the user's method of application before use.